

Braided Vinyl Tubing

July 2018



Product

Braided Vinyl Tubing

Advantages

Applications include: air conditioning and refrigeration condensate drains, condensate pump discharge lines and humidifier overflows.

- Several sizes from 1/4" to 3/4" diameter
- Available in 50ft or 100ft length
- Non-toxic clear vinyl chloride
- Maximum service temperature 140° F (60° C)
- Extra rigid design resists crimping and kinking due to durometer value of 78-80 (shore A)

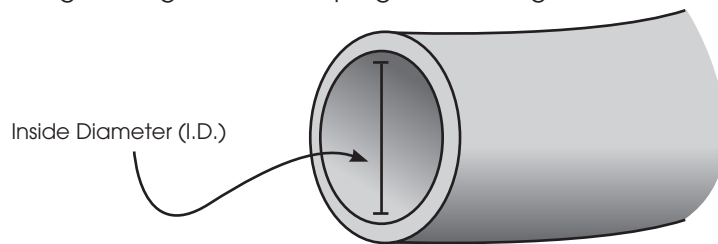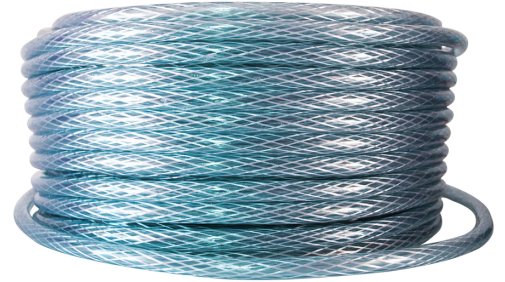

- Reinforced polyester caliber 300-500
- Hardness: 78-80 Shore A
- Recommended working temp 41°F - 140°F

ITEM #	DESCRIPTION	ORDER MULTIPLE
7-14B	1/4", .250" I.D.. 100ft Braided Reinforced Vinyl Tubing	100ft./box
7-14B50	1/4", .250" I.D.. 50ft Braided Reinforced Vinyl Tubing	50ft./box
7-38B	3/8", .375" I.D.. 100ft Braided Reinforced Vinyl Tubing	100ft./box
7-38B50	3/8", .375" I.D.. 50ft Braided Reinforced Vinyl Tubing	50ft./box
7-12B	1/2", .500" I.D.. 100ft Braided Reinforced Vinyl Tubing	100ft./box
7-12B50	1/2", .500" I.D.. 50ft Braided Reinforced Vinyl Tubing	50ft./box
7-58B	5/8", .625" I.D.. 100ft Braided Reinforced Vinyl Tubing	100ft./box
7-58B50	5/8", .625" I.D.. 50ft Braided Reinforced Vinyl Tubing	50ft./box
7-34B	3/4", .750" I.D.. 100ft Braided Reinforced Vinyl Tubing	100ft./box
7-34B50	3/4", .750" I.D.. 50ft Braided Reinforced Vinyl Tubing	50ft./box

DT PART#	I.D.	I.D. Tolerance	I.D. Max	I.D. Min	Length (ft)	Roll Weight (lbs)	Working Pressure (PSIG)	Temperature (°F)
7-14B	0.250	0.0080	0.258	0.242	100	5.04	206	140
7-14B50	0.250	0.0080	0.258	0.242	50	2.52	206	140
7-38B	0.375	0.0150	0.390	0.360	100	7.17	183	140
7-38B50	0.375	0.0150	0.390	0.360	50	3.59	183	140
7-12B	0.500	0.0250	0.525	0.475	100	8.07	135	140
7-12B50	0.500	0.0250	0.525	0.475	50	4.04	135	140
7-58B	0.625	0.0300	0.655	0.595	100	12.60	110	140
7-58B50	0.625	0.0300	0.655	0.595	50	6.30	110	140
7-34B	0.750	0.0350	0.785	0.715	100	17.13	100	140
7-34B50	0.750	0.0350	0.785	0.715	50	8.57	100	140