

Location: \_\_\_\_\_




# A1 BODY A1 BODY


**Specification:** MIFAB's A1 body Series manufactured with 8" diameter top flange designed with recessed grooves cast into the top for secure water-proofing sealing, weepholes, 1/2" trap seal primer tapping and plug and three 5/16" tappings on the top flange and underneath the top flange to receive hardware to connect with MIFAB's various membrane clamps and / or underdeck clamps. Available in either stainless steel, cast iron, PVC and / or ABS material in various outlet connection sizes (see chart below).

**Function:** Universal body that is used with all MIFAB F1000, F1100, F1300, F1320, F1420, C1000, C1100, R1100 Series of floor and area drains and cleanouts. One common body for all of these drains and cleanouts provides efficiency on the jobsite because the same body can be affixed to every pipe – regardless of whether it is a common floor drain, cleanout and / or small area drain.

## A1 BODY

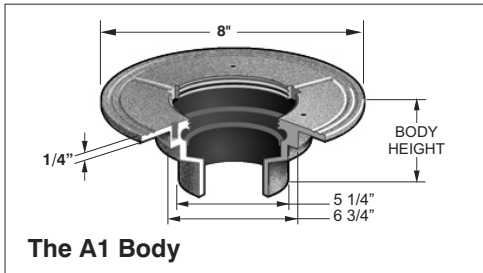

The A1 Body

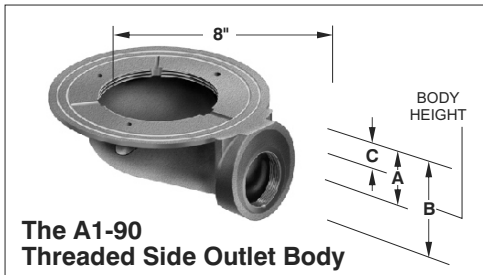

The A1-90 Threaded Side Outlet Body



The A1-90-NH No Hub Side Outlet Body

PIPE SIZE	PVC (-30) PVC (-31)	NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	STAINLESS STEEL (-28)
2"	2 5/8"	3"	3 3/8"	2 1/4"	3 3/4"	2 3/4"
3"	3 1/4"	3"	3 3/8"	2 5/8"	3 3/4"	2 3/4"
4"	3 1/2"	3"	3 3/8"	2 5/8"	3 3/4"	2 3/4"
5"	-	3"	-	2 5/8"	6 7/8"	-
6"	-	3 1/2"	6 7/8"	-	-	-

\*Specify POG-6 for C.I. pipe and POG-6-PVC for PVC pipe.  
2", 3", 4" sizes use same gasket.



A1-6NH-7

## A1-90

MODEL NUMBER	PIPE SIZE	"B" BODY HEIGHT	"A" FLANGE TO CENTER OF OUTLET	"C" FLANGE TO TOP OF OUTLET
A1-2T-90-7	2"	3 5/8"	2 1/4"	5/8"
A1-3T-90-7	3"	6 1/8"	3 1/2"	-
A1-4T-90-7	4"	6 1/8"	3 1/4"	-

## A1-90-NH

MODEL NUMBER	PIPE SIZE	"B" BODY HEIGHT	"A" FLANGE TO CENTER OF OUTLET	"C" FLANGE TO TOP OF OUTLET
A1-2T-90-NH-7	2"	3 1/2"	2 3/8"	1 1/8"
A1-3T-90-NH-7	3"	4 3/8"	2 5/8"	1"
A1-4T-90-NH-7	4"	5 3/8"	3 1/8"	1"

**Note:** No hub outlet connections are the standard outlet connection provided by MIFAB. No suffix is required to indicate the no hub outlet connection.

SUFFIX	OPTIONAL VARIATIONS
-11	Acid Resistant Coated Epoxy Body
-13	Galvanized Body
-28	Stainless Steel Body (Type 304)
-30	PVC Connection Body (2", 3" or 4")
-31	ABS Connection Body (2", 3" or 4")
-34	Close plug (C1440 Series)

SUFFIX	OPTIONAL VARIATIONS
-90	Threaded side outlet connection (2", 3" or 4"). Not available in ABS / PVC
-90NH	No hub side outlet connection (2", 3" or 4"). Not available in ABS / PVC
P	Push On Connection Body (2", 3" or 4")
T	Threaded Connection Body (2", 3" or 4")
X	Inside Caulk Connection Body (2", 3" or 4")

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Section No: \_\_\_\_\_ Page No: \_\_\_\_\_

Schedule No: \_\_\_\_\_ Contractor: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_