

**DESCRIPTION**

- Solid brass construction
- Various finishes identified by suffix
- 3/8" compression x 15" stainless steel supply lines

**OPERATION**

- Lever style handle
- Temperature controlled by 110° arc of handle travel

**FLOW**

- Water usage is limited to these maximum flow rates as indicated by the corresponding product markings
  - 1.2 gpm max (4.5L/min) at 60 psi

**CARTRIDGE**

- Ceramic disc cartridge with temperature limit stop
- Nonmetallic/nonferrous and ceramic material

**STANDARDS**

- Third party certified to WaterSense®, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- Certified to NSF 61/9 & 372
- Products marked with 1.2 gpm are compliant with California water efficiency regulations
- Complies with California Proposition 65 and with the Federal Safe Drinking

- **ADA** for lever handles

**WARRANTY**


- Warranted for 5 years against material or manufacturing defects

**Single-Handle Lavatory Faucet With Metal Drain Assembly**

MODEL	FLOW (gpm)	DRAIN	FINISH	WATERSENSE CERTIFIED
8417F12	1.2	Without	Chrome	x
8419F12	1.2	Metal	Chrome	x



**NOTE:** Designed to be installed through 1 hole 1-3/8" min. dia.

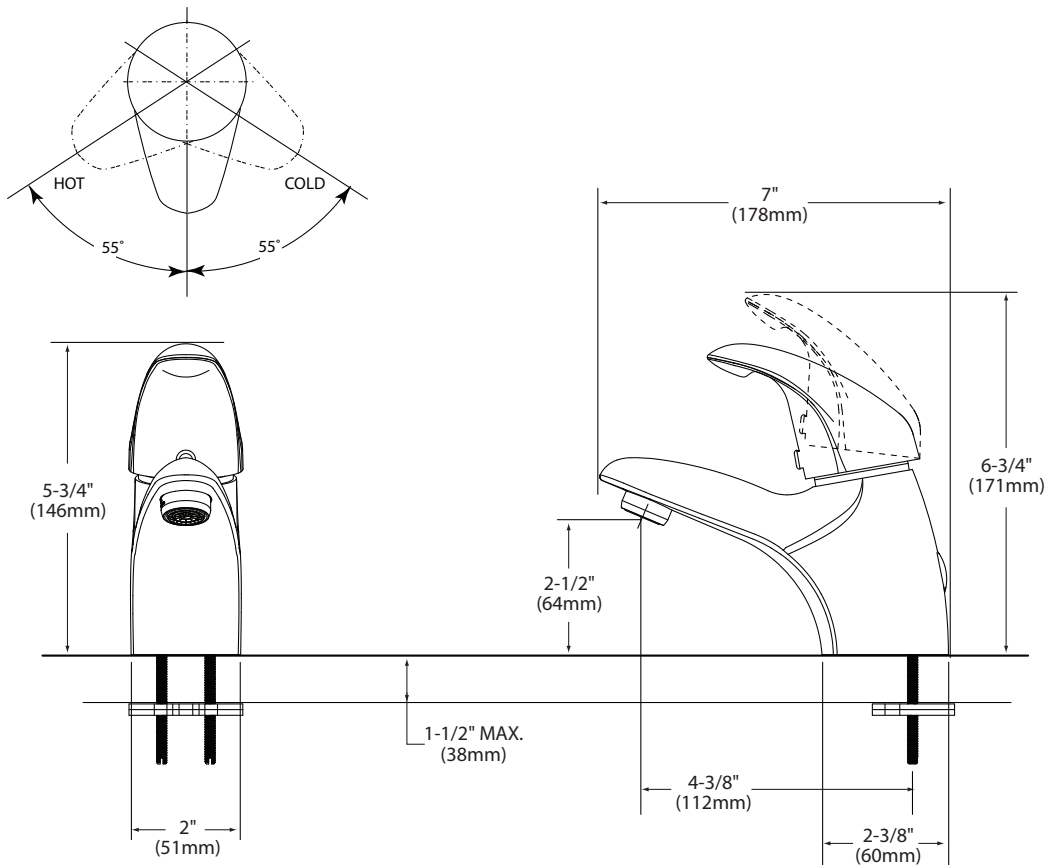

**CRITICAL DIMENSIONS**

(DO NOT SCALE)