



# Technical Sheet

## VersaCooler® II with VersaFiller®

- PG8SBF
- PGSBF

### Suggested Specification

Model PG8SBF shall deliver 8.0 gph of 50°F water at 90°F ambient and 80° F inlet water per ASHRAE 18 testing. Model PG8SBF shall include PG8AC and the VersaFiller Sports Bottle Filler with independent manual activation; lower unit shall have four antimicrobial copper push pads to activate the manual flow of water for the cooler. VersaFiller components contain Freshield®, which utilizes a silver-based antimicrobial compound to protect the surfaces from discoloration, odors and degradation caused by the growth of micro-organisms and mildew. Basin shall be designed to eliminate splashing and standing water. Water saver bubbler to reduce waste water by 50% and shall have flexible guard and operate between 20 and 100 PSI. Cabinet finish shall be brushed stainless steel or greystone on galvanized steel. Shall use R-134a refrigerant. Shall comply with ANSI 117.1 and ADA. Shall be listed by Underwriters Laboratories to US and Canadian standards. Shall comply with NSF/ANSI 61 and NSF/ANSI 372.



### Models

- PG8SBF delivers 8.0 gallons of chilled drinking water per hour.
- PGSBF is a non-refrigerated fountain.

### Standard Features

- Built-in 100 micron strainer stops particles before they enter the waterway
- Waterways are Lead-Free in materials & construction
- Flexible one-piece water saver bubbler infused with silver-based antimicrobial additive
- Stainless steel top and heavy duty galvanized steel frame
- High efficiency cooling system
- Four antimicrobial copper push pads
- External stream height adjustment on lower unit
- Independent mechanical activation VersaFiller

### Finishes

- Standard cabinet finish: Greystone powder coated paint on galvanized steel
- Optional finishes: Sandstone powder coated paint; Stainless steel (at additional cost)

### Installation

- Prior to roughing consult with local, state and federal codes for proper mounting height
- Shipped with complete instructions and wall mounting bracket
- Removable side and front panels provide easy access for installation

### Options

- One piece chrome plated brass bubbler (036700-001)
- VersaFilter

### Limited 5-Year Warranty

(Continental limits of the United States and Canada) Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

### Export Warranty

One year on components parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

### Certifications/Compliance

- Antimicrobial Copper - EPA Registration No. 89187-3
- Certified to UL 399 and CAN/CSA C22.2 No.120 (electric water coolers only)
- Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for "Lead Free" plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act
- These water coolers comply with the requirements of ADA (Americans with Disabilities Act) when properly installed



**WARNING:**  
Cancer and Reproductive Harm  
[www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)




Model	50° F Drinking Water 90° F Ambient Air Temp*			Hot*N Cold™ Model	115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Finish	Net Wt. Approx.
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
PG8SBF	8.0	8.0	No	No	1/4	4.6	460	No	Yes	60 Lbs
PGSBF	Fountain Only							No	Yes	26 Lbs

\*Industry standard rating condition 80° F inlet water temperature

Specifications subject to change without notice

# OASIS® VERSACOOLER® II MODELS

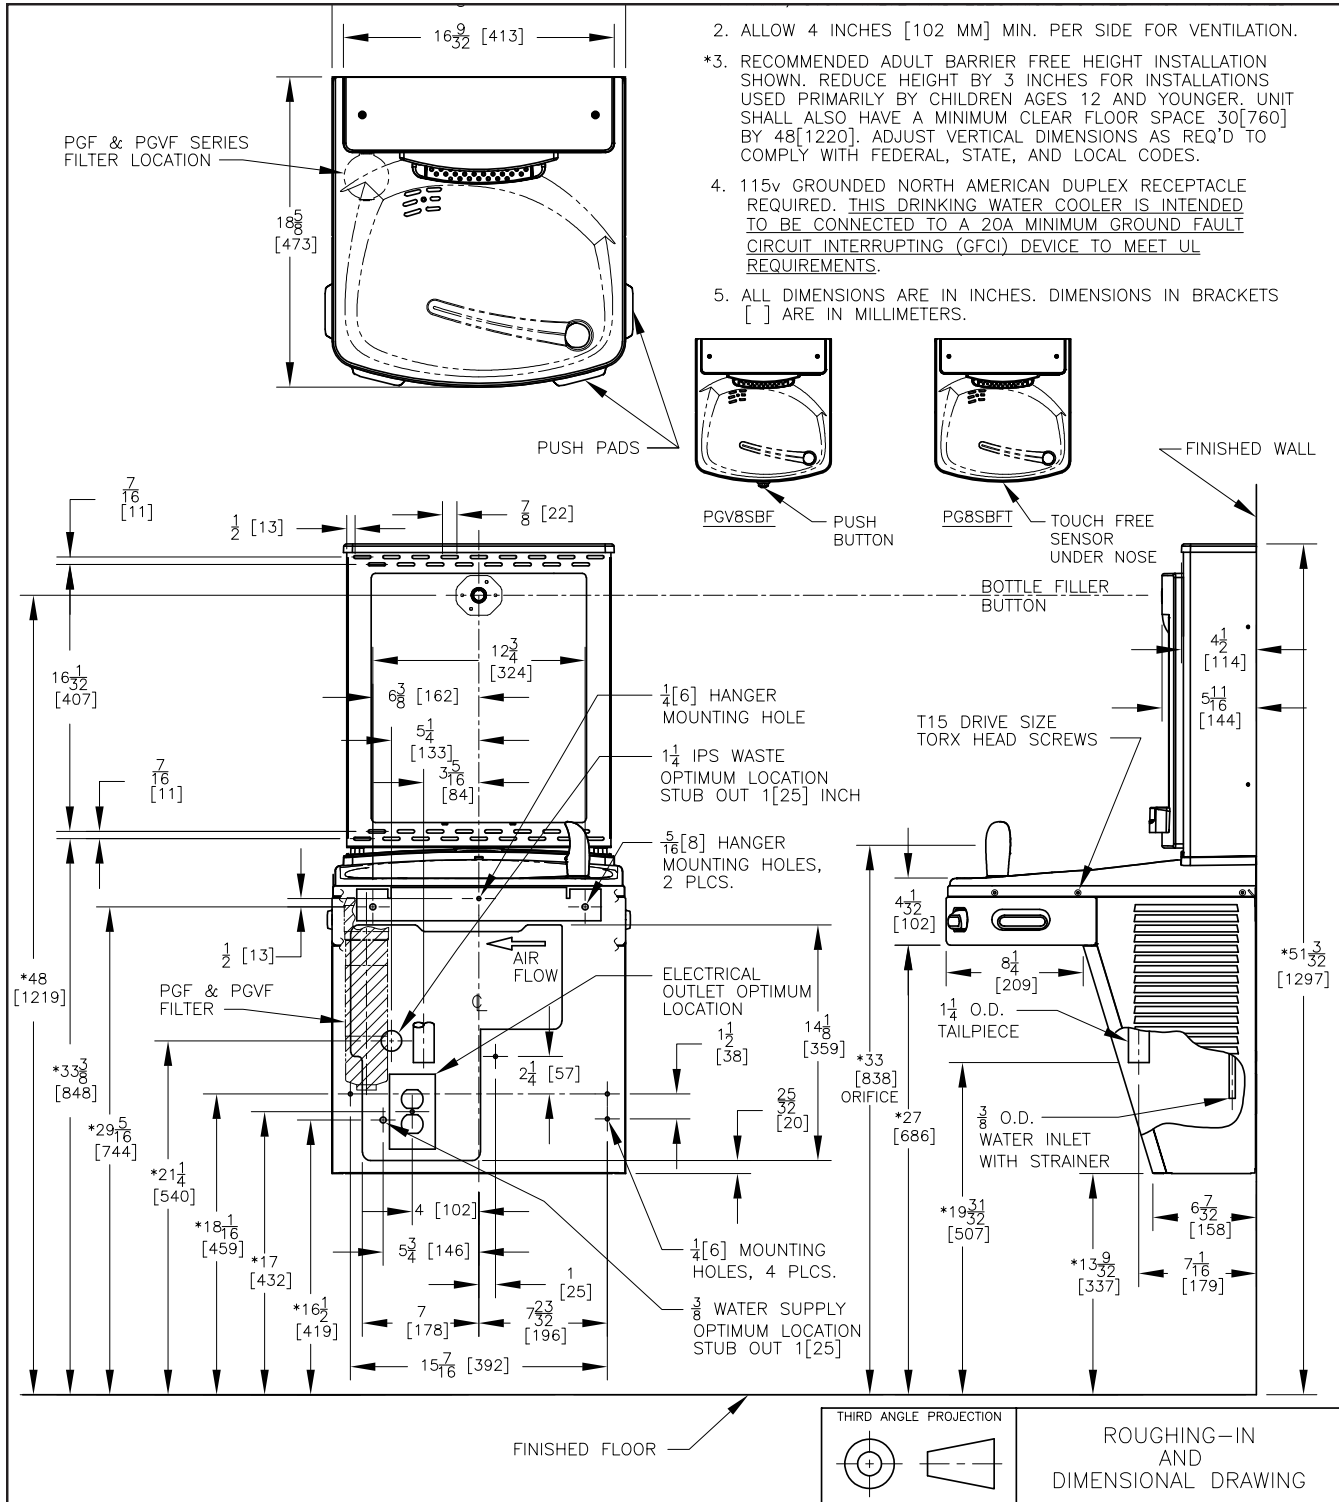

OASIS INTERNATIONAL

www.oasiscoolers.com

222 East Campus View Blvd.  
Columbus, OH 43235

1-800-646-2747