




Technical Sheet

Barrier-Free ADA Cooler

- PLF8SKTP

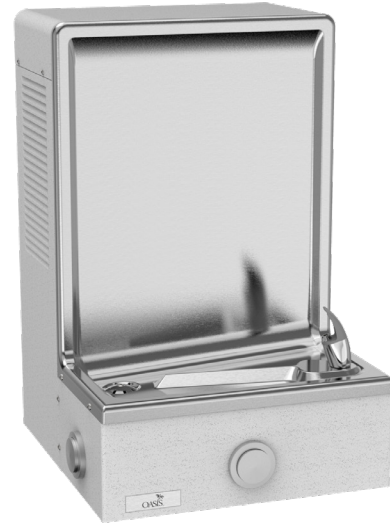

Suggested Specification

Model PLF8SKTP shall deliver 8.0 gph of 50° F water at 90° F ambient and 80° F inlet water, per ASHRAE 18 testing. Shall include push buttons on the front and both sides of the cabinet. Water flows as long as a button is depressed. Cabinet finish shall be greystone powder coated paint on galvanized steel or brushed stainless steel. Shall use R-134a refrigerant. Shall comply with ANSI 117.1 and ADA. Shall be listed by Underwriters Laboratories to US and Canadian standards. Shall comply with NSF/ANSI 61 and NSF/ANSI 372.

Models

- PLF8SKTP delivers 8.0 gph of chilled drinking water

Standard Features

- Waterways are Lead-Free in materials & construction
- • Stainless steel top
- • Welded, heavy-gauge steel frame
- • High efficiency cooling system

Finishes

- Standard cabinet finish: Greystone powder coated paint on galvanized steel
- Optional finishes: Sandstone powder coated paint; Stainless steel (at additional cost)

Installation

- Prior to roughing consult with local, state and federal codes for proper mounting height
- Shipped with complete instructions and wall mounting bracket
- Removable panels provide easy access for installation

Limited 5-Year Warranty

(Continental limits of the United States and Canada)

Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

Export Warranty

One year on components parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Certifications/Compliance

- Certified to UL 399 and CAN/CSA C22.2 No.120 (electric water coolers only)
- Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for “lead free” plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act.
- These water coolers comply with the requirements of ADA (Americans with Disabilities Act) when properly installed



WARNING:

Cancer and Reproductive Harm
www.P65Warnings.ca.gov




Model	50° F Drinking Water 90° F Ambient Air Temp*			Hot*N Cold™ Model	115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Finish	Net Wt. Approx.
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
PLF8SKTP	8.0	8.0	No	No	1/4	4.4	440	No	Yes	70 Lbs

*Industry standard rating condition 80° F inlet water temperature

Specifications subject to change without notice

OASIS® BARRIER-FREE ADA WATER COOLER MODELS

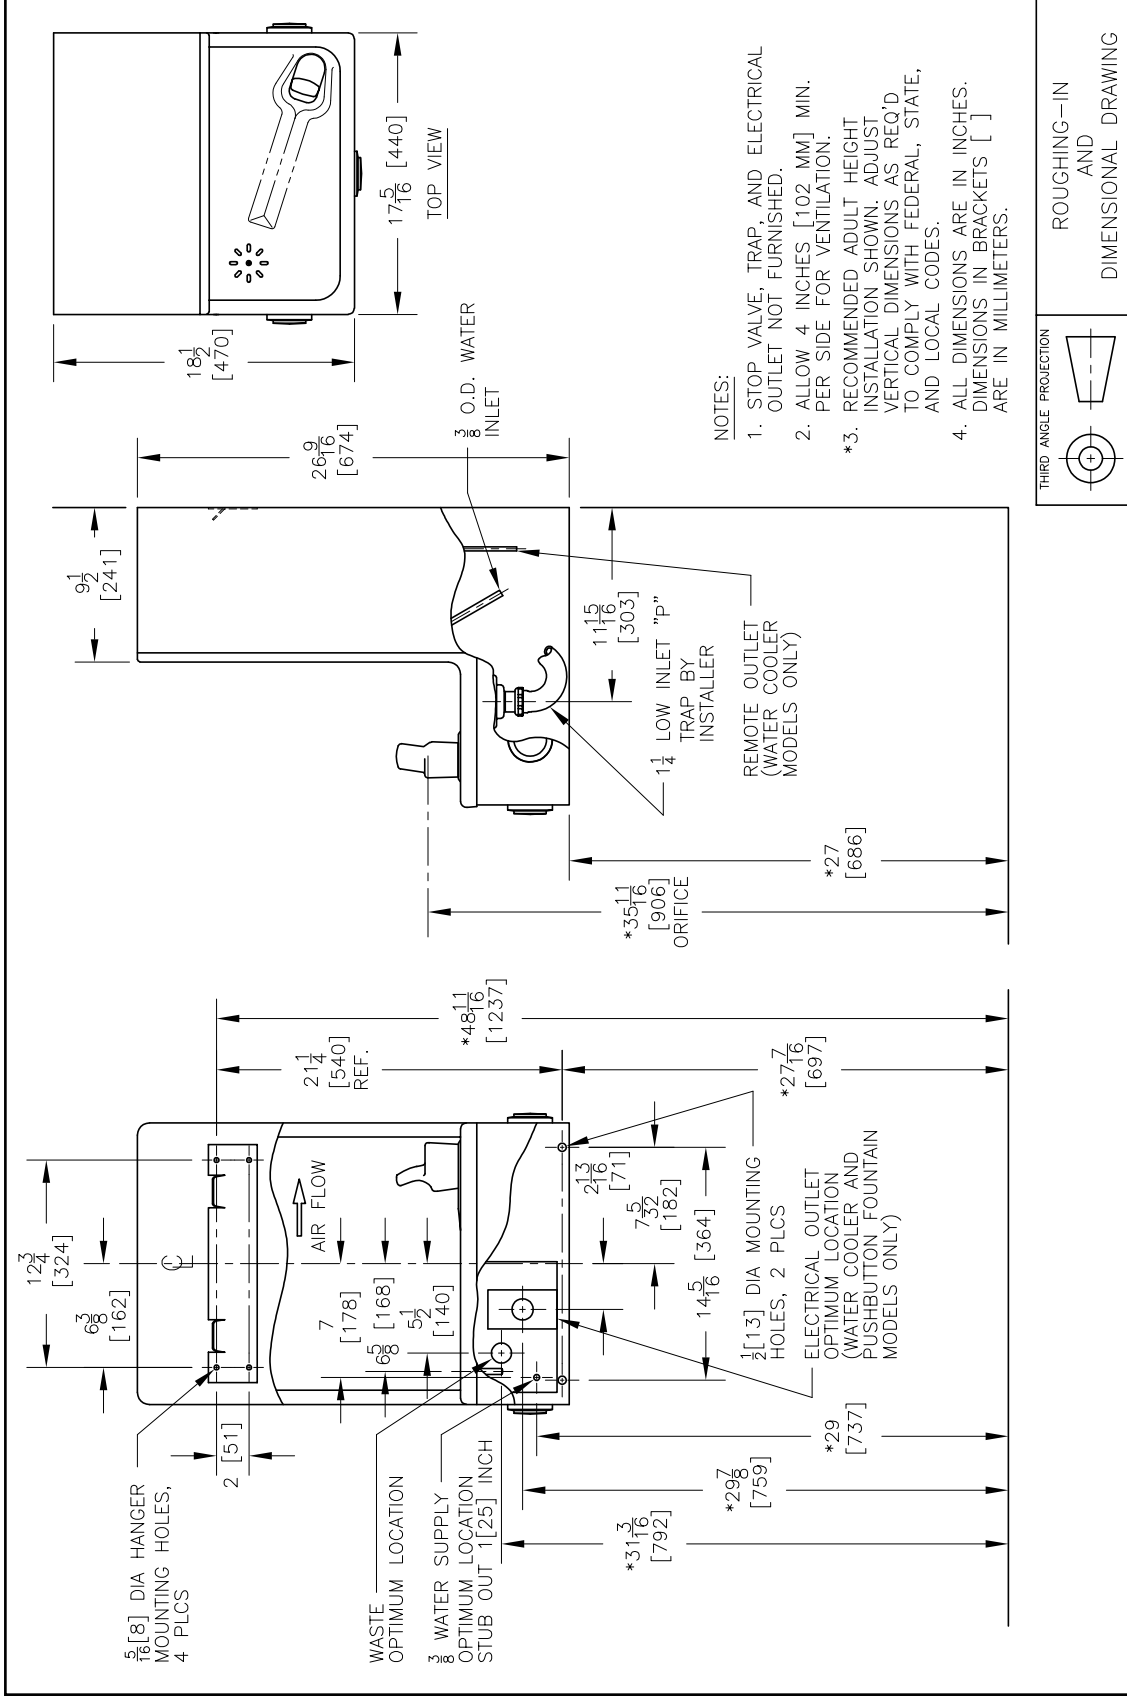

OASIS INTERNATIONAL www.oasiscoolers.com
 222 East Campus View Blvd.
 Columbus, OH 43235
1-800-646-2747

OASIS is a registered trademark of LVD Acquisition, LLC dba Oasis International, © 2019 LVD Acquisition AS0017-F-1912