



Water Coolers



REMOTE WATER CHILLERS

R8, R12

Suggested Specification

Remote drinking water chiller shall deliver at least 8.0 gph of water at 50°F cooled from 80°F inlet water at 90°F ambient. Evaporator shall be high efficiency tank type and shall be encapsulated in insulation. R-134a refrigerant system shall be hermetically sealed and refrigerant flow shall be capillary tube controlled. An adjustable thermostat having an off position shall control refrigeration system. Cabinet shall be galvanized steel. Potable water system components shall comply with Safe Drinking Water Act Amendments, the 1988 Lead Contamination Control Act and shall be Certified to ANSI/NSF 61 Section 9.

Model

R8 delivers 8 gallons of chilled water per hour
 R12 delivers 12 gallons of chilled water per hour

Standard Features

- > Waterways are Lead-Free in Materials & Construction
- > Made of Heavy Gauge Galvanized Steel
- > High-Efficiency Cooling Tank and Coil
- > Refrigerant R-134a
- > Product Certified to NSF/ANSI Standard 61, Annex G (AB1953)
- > Limited 5-Year Warranty
- > Not for use with RO Water

Installation

- > Wall-mounting cradle and stainless steel ventilating grille are available at extra cost for in wall installation
- > Shipped with complete instructions

Options (at additional cost)

- > Wall mounting Cradle and Stainless Steel Grille (030101-001)
- > Shelf Support (026929)



Components in this fountain are lead free as defined by the Safe Drinking Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.

Limited 5-Year Warranty (Continental limits of the United States and Canada): Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

Export Warranty: One year on sealed refrigeration system and most parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Product Certified to NSF/ANSI Standard 61, Annex G (weighted average lead content of $\leq 0.25\%$) and is in compliance with California's Health & Safety Code Section 116875 (commonly known as AB1953).

Models covered by this specification comply with all known Plumbing Codes. Listed by Underwriters' Laboratories to U.S. and Canadian standards and European Union Directives.



Certified to NSF/ANSI 61-G


Model	50° F Drinking Water 90° F Ambient Air Temp*			Hot 'N Cold™ Model	115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Finish	Net Wt. Approx.
	Cooling Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
R8**	8.0	n/a	n/a	n/a	1/5	4.6	340	n/a	n/a	52 Lbs.
R12**	12.0	n/a	n/a	n/a	1/5	8.7	620	n/a	n/a	52 Lbs.

*Industry Standard Rating Condition 80° F inlet water temperature.

**All models are available for export, operable on 220-240 volts 50 Hertz. UL Certification does not apply.

Specifications subject to change without notice

OASIS™ REMOTE WATER CHILLER MODELS R8, R12

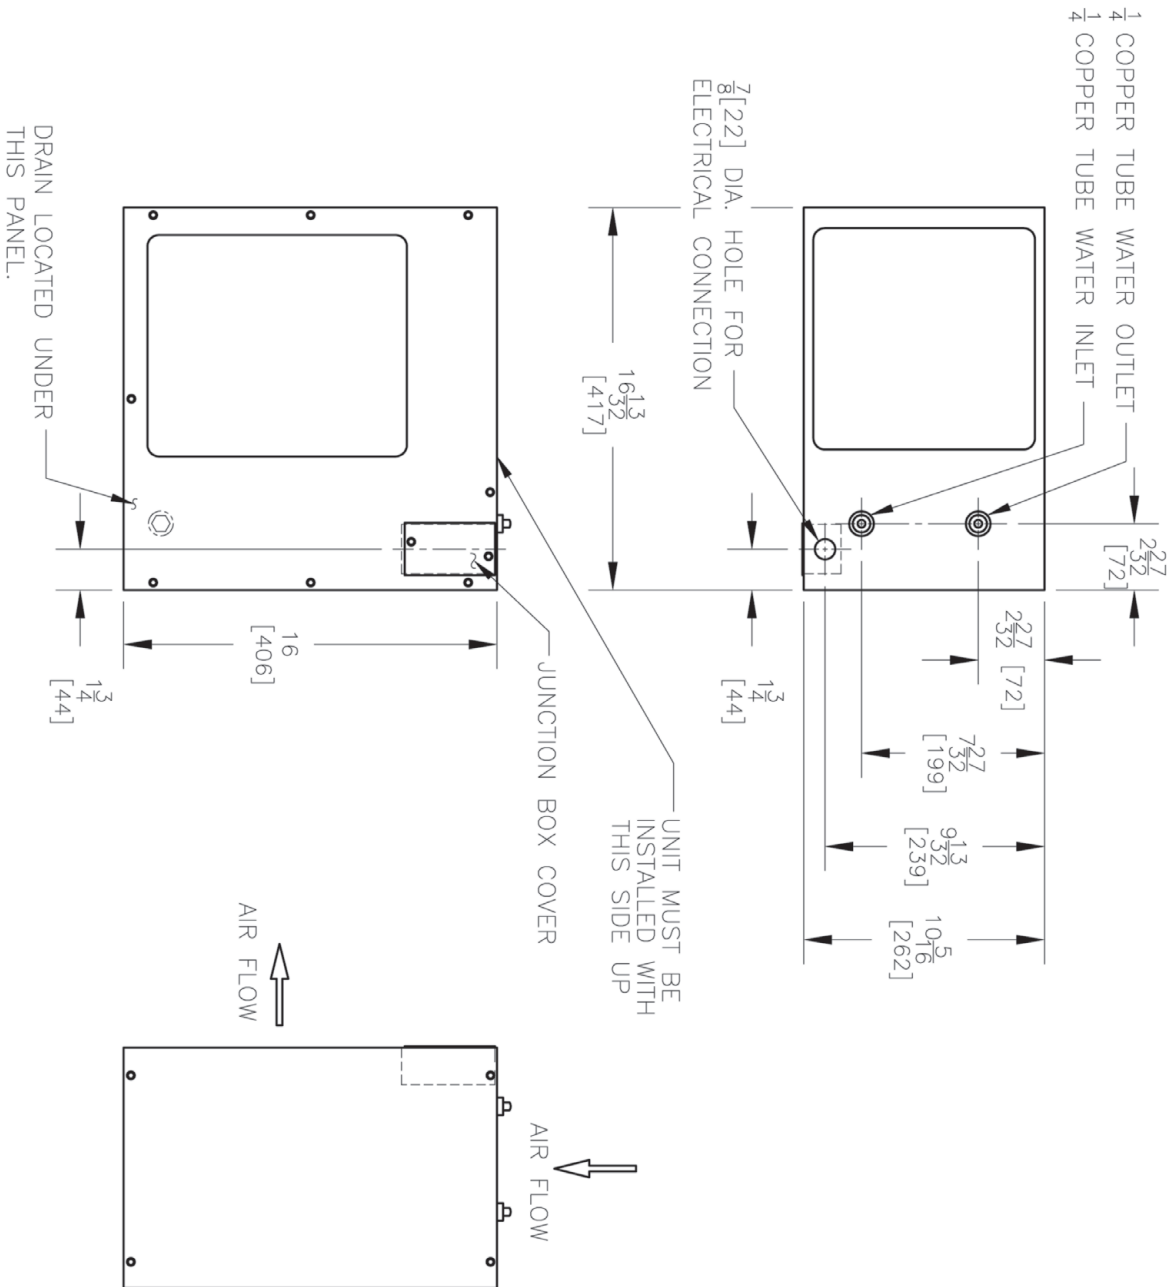

- NOTES:
1. ALLOW 5 INCHES [127 MM] MIN. PER VENTILATED SIDE.
 2. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS.
 3. NOT FOR USE WITH R.O. WATER.

<p>THIRD ANGLE PROJECTION</p>	<p>ROUGHING-IN AND DIMENSIONAL DRAWING</p>
-------------------------------	--