SEACHROME

Long Beach, California 90810 1906 East Dominguez Street Seachrome Corporation Phone: (800) 955-2476 Fax: (800) 444-3380

STR-290165-PWS

(Rear Mount Frameless) 29" x 16-1/2" Tub Seat

Customer:


Customer Part #


(Rear Mount Seat Frameless) MODEL #STR-290165-PWS


SHOWER SEAT

(White One-Piece Phenolic)

06-06-2018

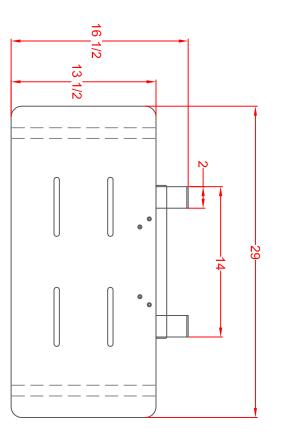



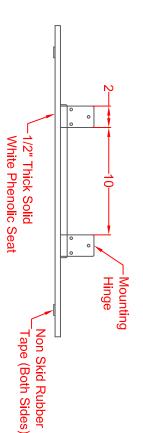

a stainless Hinge Bracket attached to the rear OPERATION:
Seat is automatically held in a raised position by securely on the tub dam for support. into its down position the Seat must rest of the Tub Seat. When the seat is lowered

ARCHITECTURAL SPECIFICATIONS:

from Seachrome Corp., Long Beach, California 90810. Phone: (800) 955-2476. Frame: Type 304 (18-8) S.S. tube 1" (25mm) x 18ga. (1.2mm) sq. main frame with 1" (25mm) x 18ga. (1.2mm) sq. cross members. Model #STE-290165-PWS Wall Hung Shower Seat

MATERIALS:

x 18ga. (1.2mm) sq. main frame with 1" (25mm) x FRAME: Type 304 (18-8) S.S. tubing, 1" (25mm) 18ga. (1.2mm) sq. cross-members.

Constant Friction Hinge. Three Mounting holes in heliarc welded to 1" (25mm) rd. x 18ga (1.2mm) $(3.4 \text{mm}) \times 2$ " (51 mm) wide $\times 3.5$ " (88.9 mm) long, WALL BRACKETS (2): Type 304 (18-8) S.S., 10ga each bracket.

SEAT CHOICES (Designate when ordering)

NW or NA - White (NW) or Almond (NA) Naugahyde covering 2" (51mm) foam mounted on 1/2" (13mm) marine plywood.

PW or PT - White (PW) or Teak (PT) Finish Phenolic 1/2" S.S. screws (13mm) x 3" (76mm) slats bolted to frame with

INSTALLATION:

bottom of hinge rests on tub surface for support). flat against the tub wall and mark holes. (Make sure Lay seat flat resting on both sides of tub. Set the hinge

fasteners and sufficient in-wall backing materials. ADA mounting height for lowered seat is 17" (432mm) to 19" All Shower Seats must only be installed using suitable