

DHC Classic Technical Specifications

Technical Data



Certified to ANSI/UL Std. 499
Conforms to CSA Std. E335-1/3E
& E60335-2-35



Tested and certified by WQA
against NSF/ANSI 372 for lead
free compliance.



Model	DHC 3-1 Classic	DHC 3-2 Classic	DHC 4-2 Classic	DHC 4-3 Classic	DHC 5-2 Classic	DHC 6-2 Classic	DHC 6-3 Classic	DHC 8-2 Classic	DHC 9-3 Classic	DHC 10-2 Classic
Item no.	202646	202647	202648	202649	202650	202651	202652	202653	202654	202655
Phase - 50/60 Hz	1									
Voltage	120 V	240 V 208 V	240 V 208 V	277 V	240 V 208 V	240 V 208 V	277 V	240 V 208 V	277 V	240 V 208 V
Wattage	3.0 kW	3.3 kW 2.5 kW	3.8 kW 2.9 kW	4.5 kW	4.8 kW 3.6 kW	6.0 kW 4.5 kW	6.0 kW	7.2 kW 5.4 kW	9.0 kW	9.6 kW 7.2 kW
Amperage	25 A	14 A 12 A	16 A 14 A	17 A	20 A 18 A	25 A 22 A	21.7 A	30 A 26 A	32.5 A	40 A 35 A
Min. recommended circuit breaker size ¹	25 A	15 A 15 A	20 A 15 A	20 A	20 A 20 A	25 A 25 A	25 A	30 A 30 A	35 A	40 A 35 A
Min. recommended wire size ²	10/2 AWG	14/2 AWG	12/2 AWG 14/2 AWG	12/2 AWG	12/2 AWG	10/2 AWG	10/2 AWG	10/2 AWG	8/2 AWG	8/2 AWG
Minimum water flow to activate unit	0.32 gpm (1.2 l/min)	0.32 gpm (1.2 l/min)	0.43 gpm (1.6 l/min)	0.43 gpm (1.6 l/min)	0.43 gpm (1.6 l/min)	0.48 gpm (1.8 l/min)	0.48 gpm (1.6 l/min)	0.69 gpm (2.6 l/min)	0.8 gpm (3.0 l/min)	0.8 gpm (3.0 l/min)
Weight	5.5 lb (2.5 kg)	4.6 lb (2.1 kg)	4.6 lb (2.1 kg)	4.6 lb (2.1 kg)	4.6 lb (2.1 kg)	5.5 lb (2.5 kg)	5.5 lb (2.5 kg)	5.5 lb (2.5 kg)	5.5 lb (2.5 kg)	5.5 lb (2.5 kg)
Dimensions	Width 7 ¹⁵ / ₁₆ " (20.2 cm) x Height 14 ³ / ₁₆ " (36.0 cm) x Depth 3 ¹ / ₈ " (9.8 cm)									
Nominal water volume	0.13 gal (0.5 l)									
Max. permissible inlet temperature	86 °F (30 °C)									
Working pressure	150 psi (10 bar)									
Tested to pressure	300 psi (20 bar)									
Water connections ³	1/2" NPT									

DHC 3-1, 3-2, 4-2 Classic ship with a 0.5 gpm (1.9 l/min) pressure compensating flow-reducer/aerator that must be installed.

¹ This is our recommendation for overcurrent protection sized at 100% of load (DP for 240/208/277 V & SP for 120 V models). Check local codes for compliance if necessary. Tankless water heaters are considered a non-continuous load.

² Copper must be used. Conductors should be sized to maintain a voltage drop of less than 3% under load.


³ Suitable for supply with cold water only.

Scroll for temp. rise charts. ↓

rev. 9.2020 | Due to our continuous process of engineering and technological advancement, specifications may change without notice.

DHC Classic Technical Specifications

Temperature Rise vs. Flow Rate at Maximum Rated Voltage

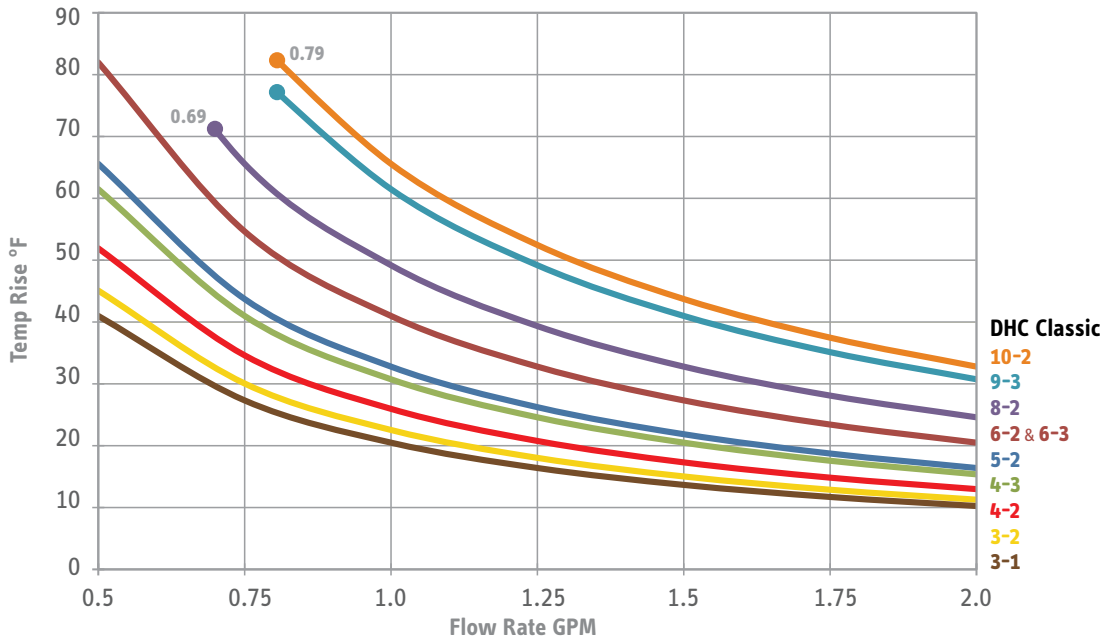

Temperature Rise vs. Flow Rate at 208 V

