For Residential and Commercial Applications

Job Name	Engineer / Architect	
Job Location	Wholesaler	
Submittal Date	Contractor	

CS41X/CS47X Multi-Turn Sweat Straight Stop w/ 5" Extension (Optional Loose Key)

Design Features:

- Machined one-piece brass body provides strength, durability, and long-lasting performance
- Easy-to-remove handle with screw attachment helps protect against accidental stop operation during rough-ins
- Oval knurled handle provides a secure grip and smooth on/off operation

. Ø

Operating Specifications:

Temperature:	40°- 140° F
Pressure:	125 PSI maximum


STOP MATERIAL SPECIFICATIONS			
Body	Brass or brass, plated		
Stem	Brass or brass, plated		
Handle	Zinc die cast, plated		
Handle Screw	Steel, zinc plated		
Bib & Packing	Rubber		
Washer			
Packing Nut	Brass or brass, plated		
Compression Sleeve	Brass		
Compression Nut	Brass or brass, plated		

Escutcheon	Steel, plated	
Loose Key Adaptor	Brass or brass, plated	
Loose Key	Zinc die cast	
Lock Shield	Brass or brass, plated	

Part Listing:

CS41BX C	1/2" nom sweat x 3/8" OD compression stop, bell escutcheon, chrome
CS41BX C1	1/2" nom sweat x 3/8" OD compression stop, bell escutcheon, chrome, window tray
CS47X C	1/2" nom sweat x 1/2" OD compression stop, chrome
CS47BX C	1/2" nom sweat x 1/2" OD compression stop, bell escutcheon, chrome
SCS41BX C	1/2" nom sweat x 3/8" OD compression stop, bell escutcheon, with loose key, chrome

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.






400.68 CS41B/47X Multi-Turn Str Stop w/5" Ext - Sweat x Comp REV 9.19

©2019 Brasscraft Manufacturing Company

Use: For use with potable water systems in accessible locations only. Not intended for recirculating water systems that produce continuous use temperatures above 115° F. For those applications, use our KT[™] series ball stops

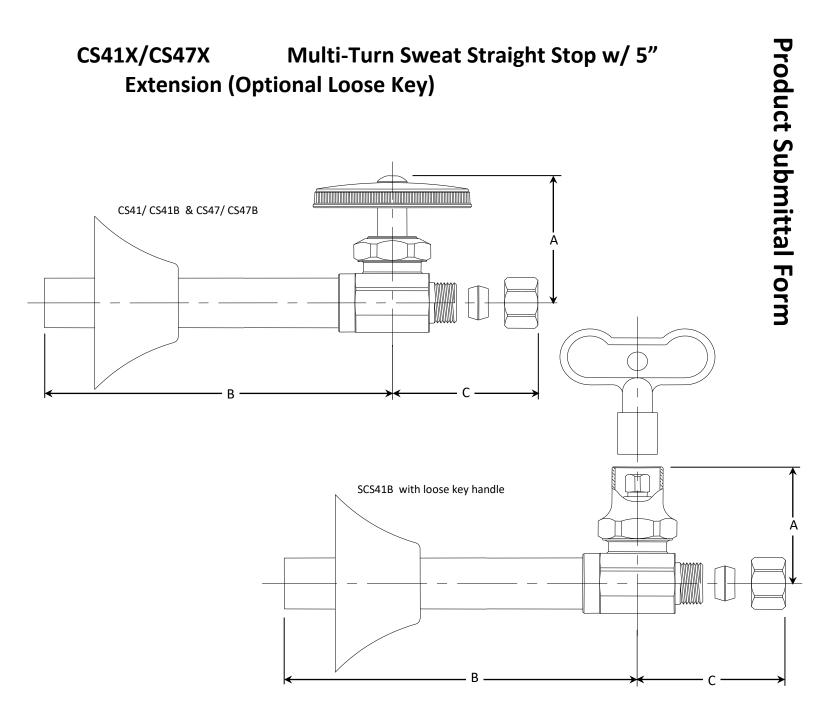

PART DIMENSIONS (Inches)			
Model	DIM A	DIM B	DIM C
CS41BX	1.75	5.50	1.09
CS47X	1.75	5.50	1.12

PART DIMENSIONS (Inches)			
Model	DIM A	DIM B	DIM C
CS47BX	1.75	5.50	1.12
SCS41BX	1.57	5.50	1.09

Listings & Certifications:

 IAPMO listed to ASME A112.18.1 / CSA B125.1 (includes NSF/ANSI372 & NSF61)

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

400.68 CS41B/47X Multi-Turn Str Stop w/5" Ext - Sweat x Comp REV 9.19

