THIS SPACE FOR DESIGNER/ENGINEER APPROVAL									
Job/Customer	Date	Contractor							
Model Specified	Qty	Approved By							
Designer/Engineer	Date	Contractor's PO#							
Submitted By	Date	Other							

4372 Series

Full Port 316 Stainless Steel Ball Valves


2 Piece Investment Cast w/ 304 Stainless Steel Handle

IPS

1000 WOG / 150 WSP

ISO 9001

ITEM #	SIZE	CTN	CASE	Α	В	С	D	E	Cv		
LOCKING HANDLE											
43720	1/4"	2	100	1/4	2 1/8	1 3/4	3 11/16	1 1/8	7.5		
43721	3/8"	2	100	3/8	2 1/8	1 3/4	3 11/16	1 1/8	8.6		
43722	1/2"	2	80	1/2	2 7/16	1 15/16	4 1/8	1 1/8	14.3		
43723	3/4"	2	40	3/4	2 13/16	2 1/2	4 5/8	1 3/8	29.2		
43724	1"	2	40	1	3 1/4	2 9/16	5 1/8	1 1/2	56.5		
43725	1 1/4"	2	20	1 1/4	3 7/8	2 13/16	5 5/16	1 1/2	114.0		
43726	1 1/2"	2	16	1 1/2	4 3/16	3 3/8	6 11/16	1 1/2	161.3		
43727	2"	2	10	2	4 3/4	3 11/16	6 11/16	-	248.6		
OVAL HANDI	.E										
43722-OH	1/2"	1	40	1/2	2 7/16	1 15/16	3 15/16	1 1/8	14.3		
43723-OH	3/4"	1	30	3/4	2 13/16	2 1/2	5	1 3/8	29.2		
43724-OH	1"	1	20	1	3 1/4	2 9/16	5	1 1/2	56.5		

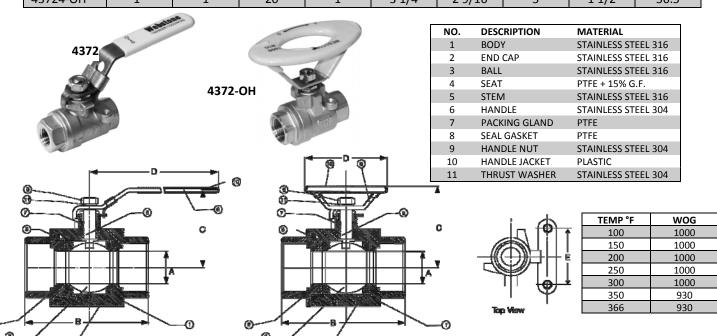

Specifications: Designed for residential, commercial or industrial use with water, oil or gas. This approved Webstone valve is actuated by a blowout proof stem and features an adjustable packing gland. It features an actuator mount, ideal for use in applications where automating the valve's operation is desired (actuator not included). Threaded ends comply with ANSI B1.20.1.



Quality and Commitment Since 1954

Tel: (800) 225-9529 • Fax (800) 336-5133